






CARISMA METALLIC

Roller Blind / Roman Blind / Panel Tracks

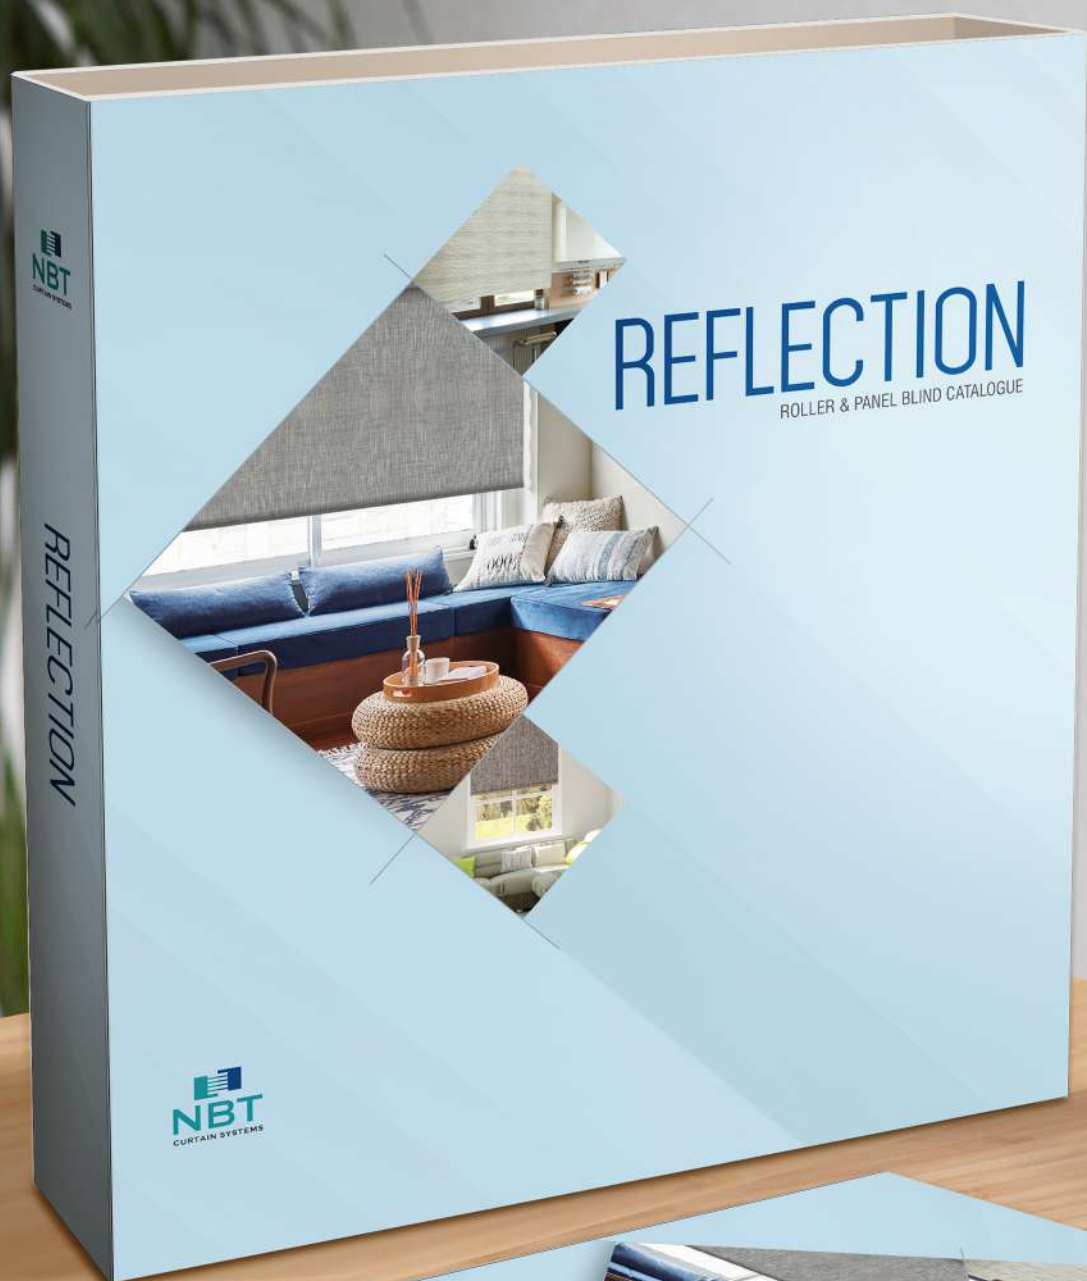

**40616 - 5615
SILVER SHADOW**



**40616 - 5616
COPPER**

CARISMA METALLIC

Roller Blind / Roman Blind / Panel Tracks




TECHNICAL DETAILS

WIDTH:	215 cm
WEIGHT APPROX:	55 g/m²
THICKNESS APPROX:	0.36 mm
MANUFACTURING GUIDANCE:	TO CUT WITH COLD KNIFE, NON RAILROADING (fabric length for drop recommended)
ROLL LENGTH APPROX:	40 m
CARE INSTRUCTION:	SPONGEABLE, HAND-WASHABLE ACCORDING TO INSTRUCTION
TRANSPARENCY DEGREE:	TRANSPARENT
SUITABLE FOR MOIST ATMOSHERE:	YES
SUITABLE FOR OFFICE ENVIRONMENT:	NO
(according to light transmission)	
MOISTURE SHRINKAGE(%):	WARP / WEFT: <0.5
LIGHT FASTNESS (window side):	>_ 6-7
RUBBING FASTNESS:	>_ 5
RADIATION RATE:	AVAILABLE ON REQUEST

RO ONDA

Roller Blind / Roman Blind / Panel Tracks

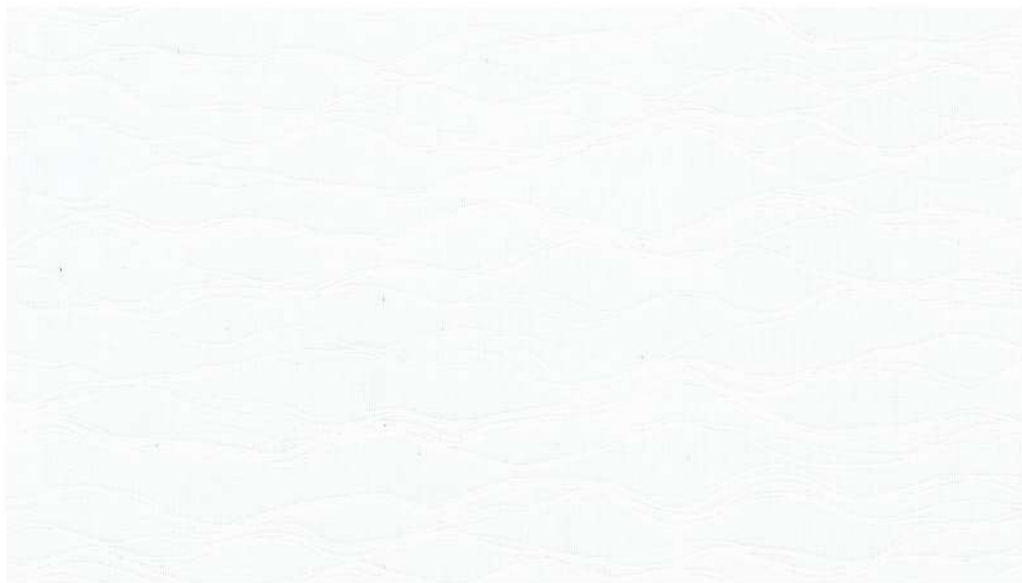

**40772 - 6546
WAVE WHITE**



**40772 - 10430
SHARK GREY**

RO ONDA

Roller Blind / Roman Blind / Panel Tracks




TECHNICAL DETAILS


BASIC MATERIAL:	100% POLYESTER
WIDTH:	235 cm col. 6546
WEIGHT APPROX:	110 g/m²
THICKNESS APPROX:	0,55 - 0,60 mm
MANUFACTURING GUIDANCE:	TO CUT WITH COLD KNIFE, OR HOT KNIFE
ROLL LENGTH APPROX.	40 m
CARE INSTRUCTION:	BRUSH OFF, VACCUM
TRANSPARENCY DEGREE:	TRANSPARENT
SUITABLE FOR MOIST ATMOSHERE:	YES
SUITABLE FOR OFFICE ENVIRONMENT:	NO
(according to light-transmission)	
MOISTURE SHRINKAGE (%)	WARP / WEFT: <0.5
LIGHT FASTNESS (window side)	>_ 6
RUBBING FASTNESS:	>_ 5
RADIATION RATE:	AVAILABLE ON REQUEST

MUSLIN

Roller Blind / Roman Blind / Panel Tracks

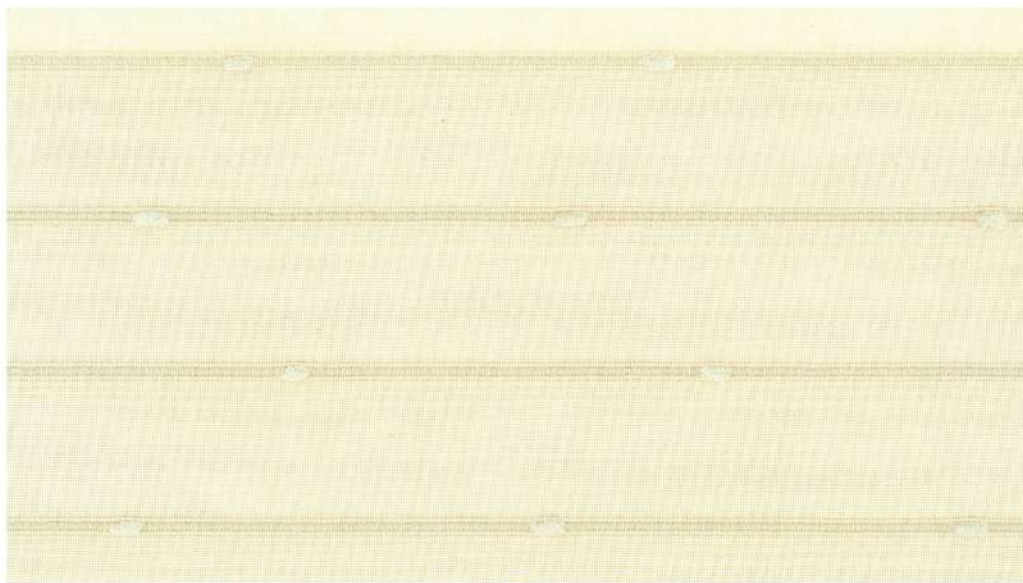

40804-7800
CLASSIC BEIGE

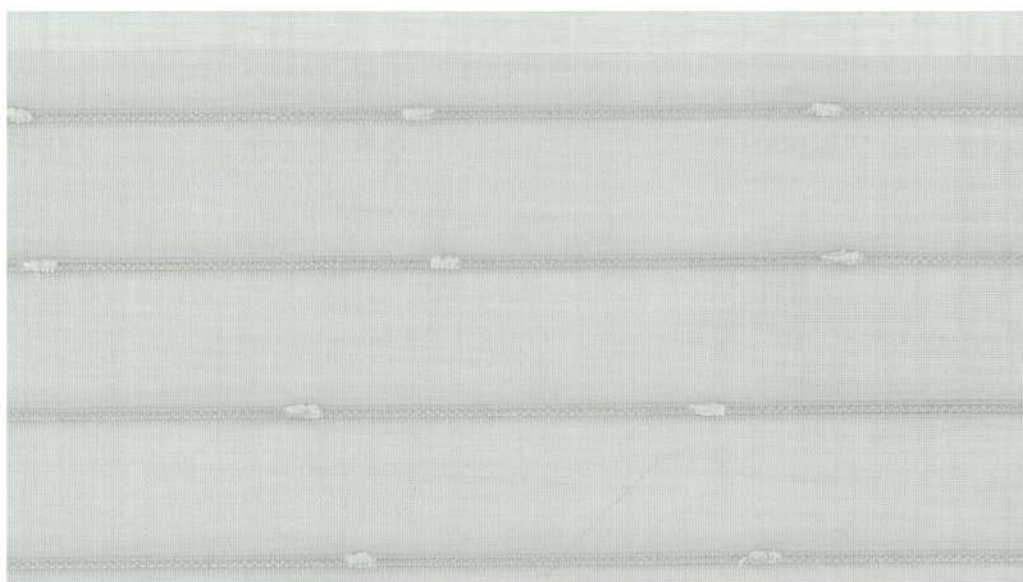

40804-10426
DOLPHIN GREY

MUSLIN

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS

BASIC MATERIAL:	100% POLYESTER
WIDTH:	240 CM
WEIGHT:	95 G/M2
THICKNESS:	0.25-0.76MM
CARE INSTRUCTION:	SPONGEABLE
SUITABLE FOR MOIST ATMOSPHERE:	YES
TRANSPARENCY DEGREE:	HIGH

SLIZZA


Roller Blind / Roman Blind / Panel Tracks




SL-12
MAGIC WHITE



SL-25
CREAM TEA

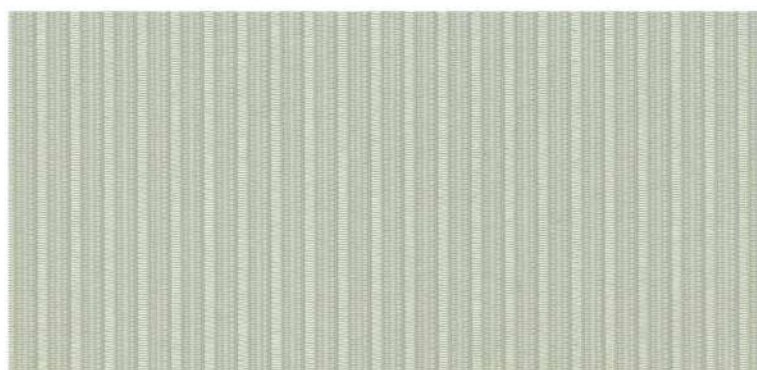

SL-43
MERRION GREY

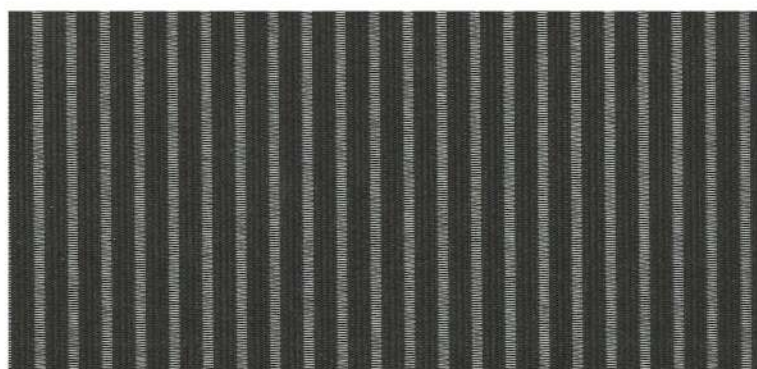

SL-87
CHERRY TRUFFLE

SLIZZA

Roller Blind / Roman Blind / Panel Tracks




TECHNICAL DETAILS

1.BASIC MATERIAL	PES100%
2.DENSITY	24 COURSE (TRICOT)
3.WEIGHT (G/M2)	120.2 ($\pm$ 5%)
4.THICKNESS (MM)	0.36 ($\pm$ 5%)
5.ROLL WIDTH	3 m
6.ROLL LENGTH	50 m
7.DYEING METHOD	COLOR COATED (=PIGMENT DYED)
8.TYPE OF FINISHING	RESIN COATED

GIONA

Roller Blind / Roman Blind / Panel Tracks

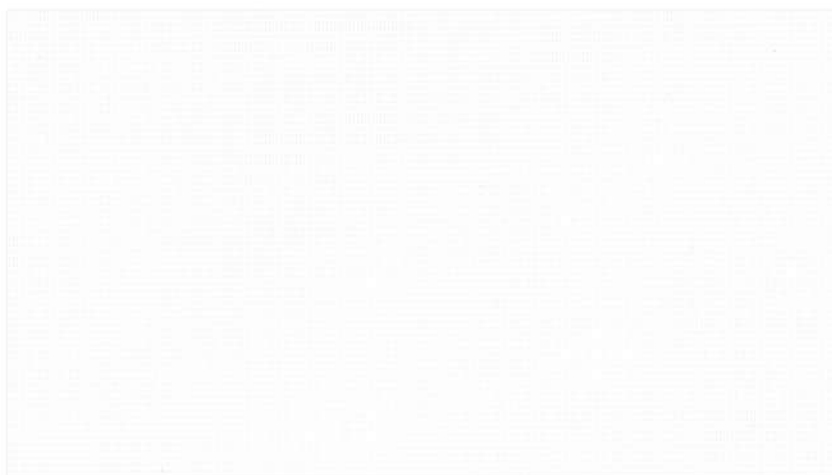

GI-15
RICE



GI-97
MATTE BLACK



GI-25
BEIGE

GIONA

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS


1.BASIC MATERIAL:	PES100%
2.DENSITY:	50*45($\pm$ 5%)
3.WEIGHT (G/M2):	162.5 ($\pm$ 5%)
4.THICKNESS (MM):	0.35 ($\pm$ 5%)
5.ROLL WIDTH:	3 m
6.ROLL LENGTH:	50 m
7.DYEING METHOD:	COLOR COATED (=PIGMENT DYED)
8.TYPE OF FINISHING:	RESIN COATED

BELICE

Roller Blind / Roman Blind / Panel Tracks



**BE-13
WHITE**

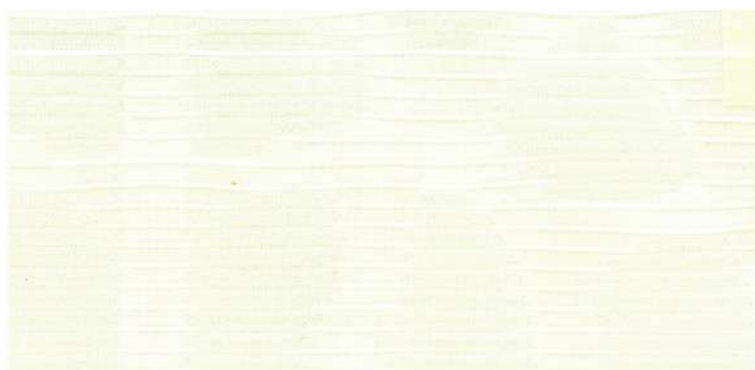

**BE-23
EGG SHELL**



**BE-45
FLANNEL GREY**



**BE-87
WINE**

BELICE

Roller Blind / Roman Blind / Panel Tracks




TECHNICAL DETAILS

1.BASIC MATERIAL:	PES100%
2.DENSITY:	120*120(± 5%)
3.WEIGHT (G/M2):	135.4 (± 5%)
4.THICKNESS (MM):	0.6 (± 5%)
5.ROLL WIDTH:	2.8 m
6.ROLL LENGTH:	50 m
7.DYEING METHOD:	SOLUTION DYED (=DOPE DYED)
8.TYPE OF FINISHING:	UNCOATED




EARTH COMBINATION DIMOUT


Roller Blind / Roman Blind / Panel Tracks

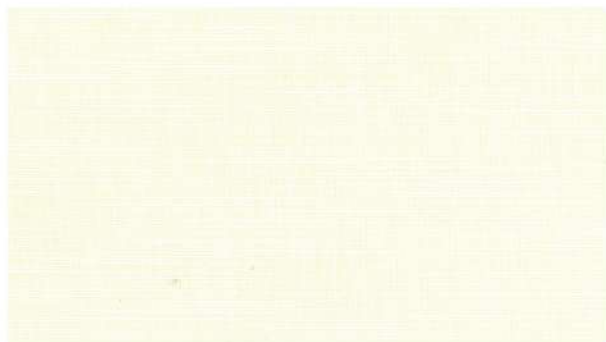

ET01
OAT

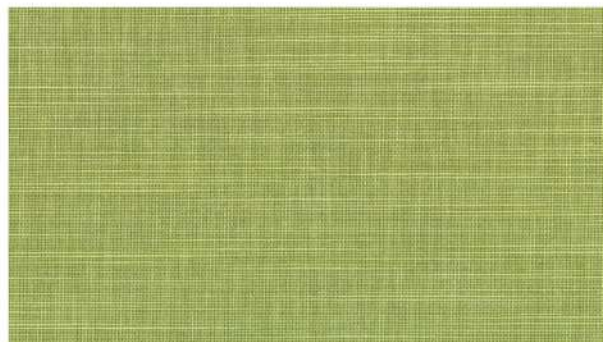

ET03
GARDEN GREEN

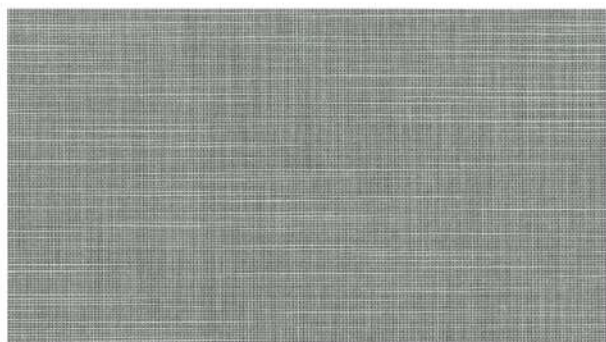

ET05
MOON GREY



ET04
VENETIAN RED



ET06
MULBERRY

EARTH COMBINATION DIMOUT

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS

BASIC MATERIAL:	100% POLYESTER
FINAL WIDTH:	240 cm
FABRIC WEIGHT (g/M2):	APPROX. 185 g/m²
THICKNESS (DIN EN ISO 5084):	APPROX. 0.40 mm
LIGHT FASTNESS: WINDOW SIDE:	> 5-6 (Dep. on Colour)
(DIN ISO 105-B02)	
RUBING FASTNESS:	> 3-4 (Dep. on Colour)
(DIN ISO 105-X 12)	
RADIATION RATE:	Dep. on Colour
MOISTURE SHRINKAGE%:	<0.5 (Warp)
ACCORDING TO DIN 53892 B2:	<0.5 (Weft)
STANDARD ROLL LENGTH:	40 m
MANUFACTURE	
RECOMMENDATION:	TO CUT WITH COLD KNIFE
CARE INSTRUCTION:	SPONGEABLE

TRENT

Roller Blind / Roman Blind / Panel Tracks



TR-3012
SILKY WHITE



TR-3035
TURKISH ROSE



TR-3037
BEIGE GOLD



TR-3083
SATIN SHEEN

TRENT

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS

BASIC MATERIAL:	PES100%
DENSITY:	210*60(±5%)
WEIGHT (g/M2):	198(±5%)
THICKNESS (MM):	0.29(±5%)
ROLL WIDTH:	2.8 m
ROLL LENGTH:	40 m
DYEING METHOD:	YARN DYED
TYPE OF FINISHING:	UNCOATED

RHINE

Roller Blind / Roman Blind / Panel Tracks



RH-13
COTTON WHITE



RH-55
BLUE



RH-25
CREAM



RH-84
BRUNETTE



RH-67
GREEN



RH-48
GREY WOLF

RHINE

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS

BASIC MATERIAL:	PES100%
DENSITY:	104*100(±5%)
WEIGHT (g/M2):	1176.2(±5%)
THICKNESS (MM):	1.44(±5%)
ROLL WIDTH:	2.8 m
ROLL LENGTH:	30 m
DYEING METHOD:	PIECEDYED
TYPE OF FINISHING:	UNCOATED

HESSIAN

Roller Blind / Roman Blind / Panel Tracks



**H04
MUSTARD**



**H03
PAPYRNS**



**H02
PATINA**

HESSIAN

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS

BASIC MATERIAL:	100% POLYESTER
FINISHING:	STIFF FINISH
BACKSIDE:	-
FLAME-RETARDANT:	NO
SUITABLE FOR MOIST ATMOSPHERE:	YES
SUITABLE FOR OFFICE ENVIRONMENT:	YES
FINAL WIDTH:	2.3 mtr
FABRIC WEIGHT:	APPROX 215 g/m ²
THICKNESS:(DIN EN ISO 5084)	APPROX 0.73mm
LIGHT FASTNESS: WINDOW SIDE	DIN ISO 105 - B02: WINDOW SIDE: >6
RUBING FASTNESS:DRY	DIN ISO 105: DRY - 5
MOISTURE SHRINKAGE%:	% WARP <0.5, WEFT >0.5
RADATION RATE:	DEPENDING ON COLOUR
STANDARD ROLL LENGTH:	40 m
MANUFACTION	
RECOMMENDATION:	LENGTH TO DROP WITH COLD KNIFE IN WARP DIRECTION MANUFACTURING & CUTTING IN WEFT DIRECTION TO BE TESTED IN ADVANCE
CARE INSTRUCTION:	SPONGEABLE, HAND CLEANING

BURLAP

Roller Blind / Roman Blind / Panel Tracks


NBT
CURTAIN SYSTEMS



B05
ALMOND



B04
LICORICE

BURLAP

Roller Blind / Roman Blind / Panel Tracks




TECHNICAL DETAILS

FABRIC WIDTH:	2.8 m
COMPOSITION:	PES 100%
DENSITY:	13.5*17
WEIGHT G/M2):	257.7 (± 5%)
THICKNESS (MM):	0.62~0.8 (± 5%)
ROLL LENGTH:	30 m
DYEING METHOD:	YARN DYED
TYPE OF FINISHING:	RESIN COATED




DIMOUT

Roller Blind / Roman Blind / Panel Tracks

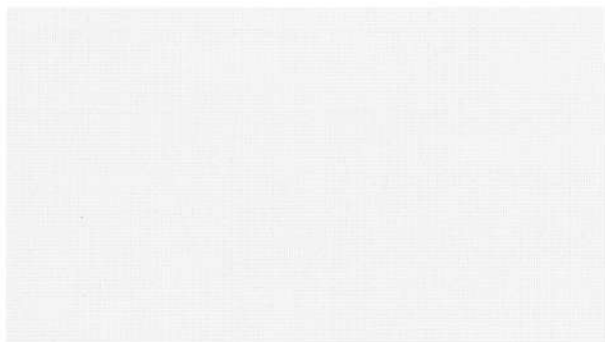

DO01
LILY

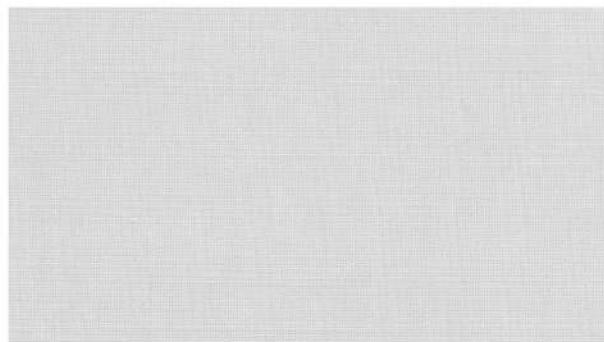


DO05
GREY



DO09
CREAM




DO07
BLUE

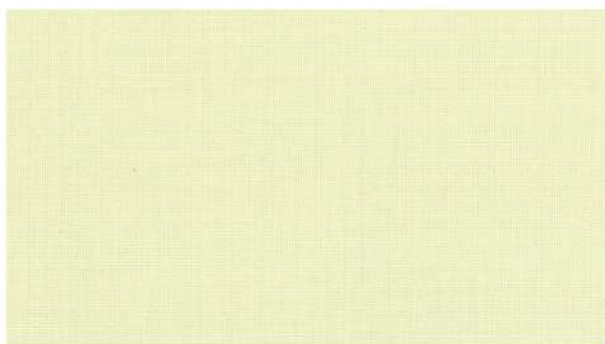

DO02
COCONUT



DO06
TOPAZ

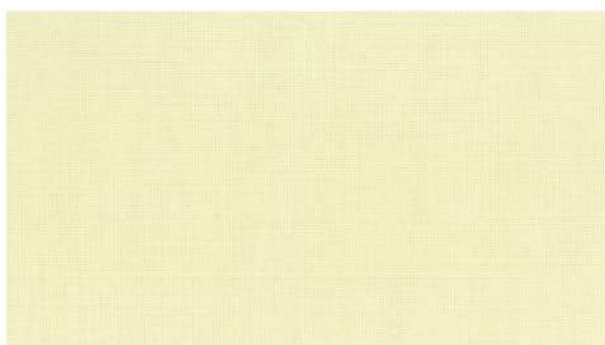

DO03
SAND



DO14
SLATE

DIMOUT

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS


MAXIMUM WIDTH:	200 - 300 cm
CHARACTERISTICS:	TRANSLUCENT
COLOUR FASTNESS:	>4
WEIGHT:	230 GSM + 15
COMPOSITION:	100% POLYESTER
UV PROTECTION FACTOR:	UPF : 500 (GB/T 18830-2002
THICKNESS:	0.38 + 0.007 mm
STANDARD ROLL LENGTH:	50 mtrs
AVAILABILITY:	EX STOCK IN ALL STANDARD COLOURS ENCLOSED HEREWITH

DIMOUT


Roller Blind / Roman Blind / Panel Tracks




DO04
YELLOW

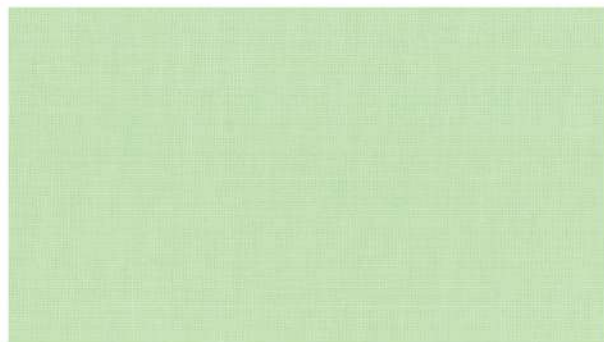

DO08
TULIP

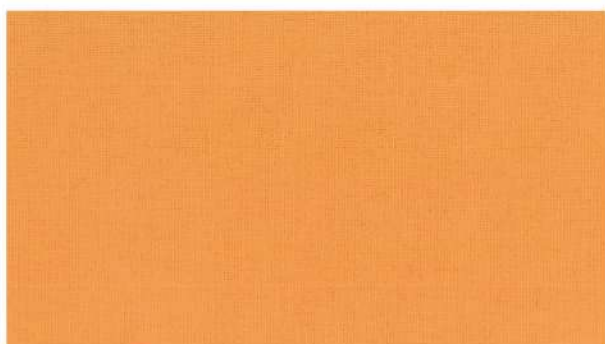


DO10
ORANGE

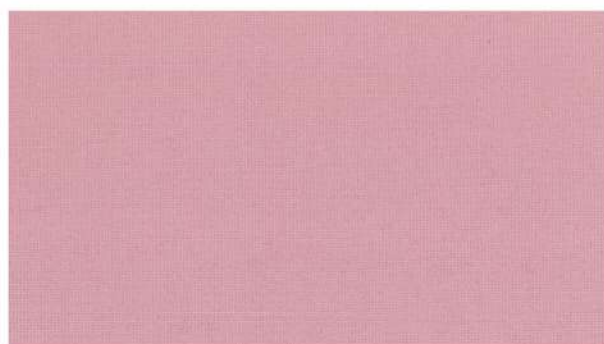

DO11
CORAL



DO12
COPPER

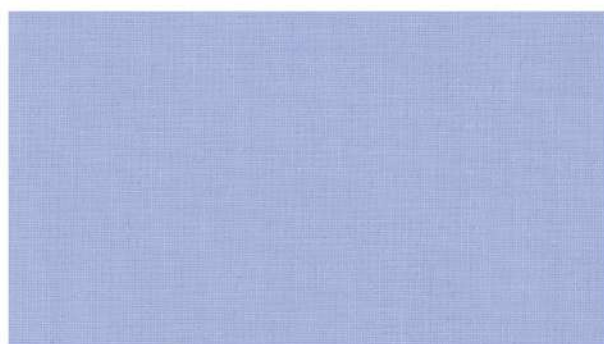

DO13
PLUM

DIMOUT

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS

MAXIMUM WIDTH:	200 - 300 cm
CHARACTERISTICS:	TRANSLUCENT
COLOUR FASTNESS:	>4
WEIGHT:	230 GSM + 15
COMPOSITION:	100% POLYESTER
UV PROTECTION FACTOR:	UPF : 500 (GB/T 18830-2002)
THICKNESS:	0.38 + 0.007 mm
STANDARD ROLL LENGTH:	50 mtrs
AVAILABILITY:	EX STOCK IN ALL STANDARD COLOURS ENCLOSED HEREWITH



MIDNIGHT FABRIC BLACKOUT

Roller Blind / Roman Blind / Panel Tracks



**MB20
WHITE**



**MB23
OAK**



**MB22
KHAKHI**



**MB24
WOOD**



**MB25
STONE**

MIDNIGHT FABRIC BLACKOUT

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS

MAXIMUM WIDTH:	2 mtrs - 3 mtrs
CHARACTERISTICS:	BLACKOUT
COLOURS:	8 COLOURS
COATING:	DOUBLE SIDE ACRYLIC COATING REVERSE SIDE WITH FOAM COATING (PVC) DUPONT SYMBOL
WEIGHT:	100% POLYESTER
COMPOSITION:	5
LIGHT FASTNESS GRADE:	0.40 mm - 0.5 mm
THICKNESS:	NO
PECULIAR SMELL:	SPONGIABLE
HINT FOR CARE & CLEANING:	WITHIN USUAL TRADE TOLERANCES
MATCHING COLOURS & PRINT:	EX STOCK IN ALL STANDARD COLOURS
AVAILABILITY:	ENCLOSED HEREWITH

MIDNIGHT BLACKOUT


Roller Blind / Roman Blind / Panel Tracks




MB2440
COSMIC LATTE



MB2441
OYSTER

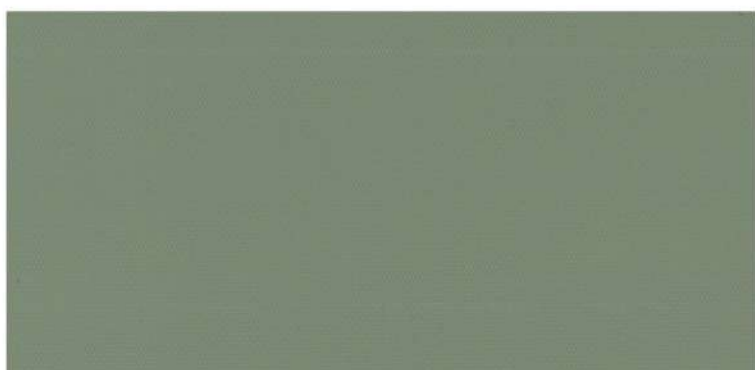

MB2442
SAGE

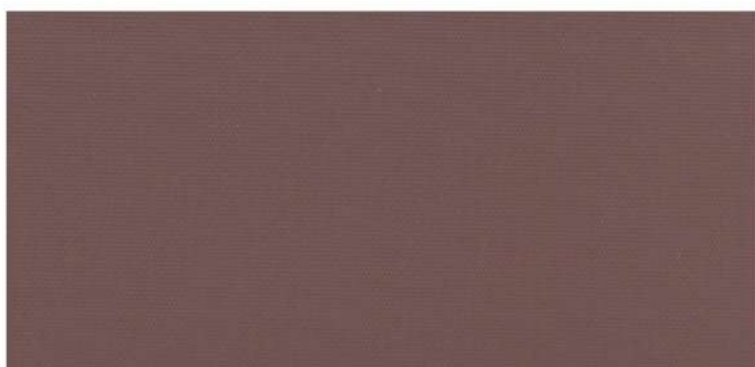

MB2443
ROSEWOOD

MIDNIGHT BLACKOUT

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS

MAXIMUM WIDTH:	2 mtrs - 3 mtrs
CHARACTERISTICS:	BLACKOUT
COLOURS:	11 COLOURS
COATING:	ACRYLIC COATING
COMPOSITION:	100% POLYESTER
FIRE CLASSIFICATION:	TESTED TO AS 1530 PART III PVC FREE / DUST RESISTANT
PECULIAR SMELL:	NO
HINT FOR CARE & CLEANING:	CONDITIONALLY CLEANABLE WITH DAMP CARE
MATCHING COLOURS & PRINT:	WITHIN USUAL TRADE TOLERANCES
AVAILABILITY:	EX STOCK IN ALL STANDARD COLOURS ENCLOSED HEREWITH

MIDNIGHT BLACKOUT


Roller Blind / Roman Blind / Panel Tracks



**MB06
WATER**



**MB09
CARAMEL**

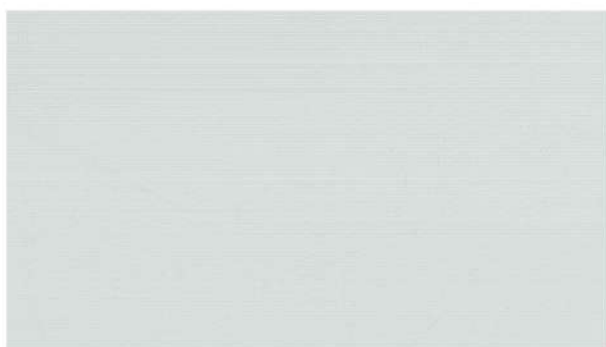

**MB32
DRIZZLE**



**MB11
CLAY**




**MB15
GRANITE**



**MB12
FLEECE**



**MB16
CHARCOAL**

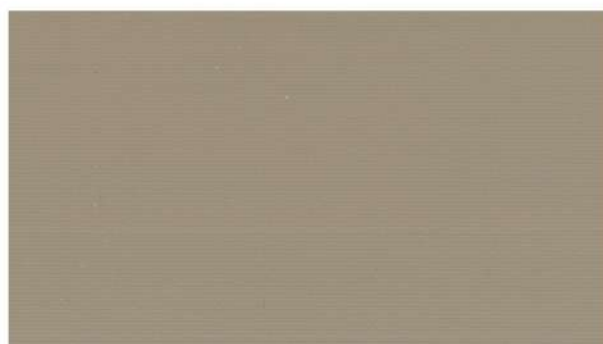

**MB13
TOFFEE**

MIDNIGHT BLACKOUT

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS

MAXIMUM WIDTH:	2 mtrs - 3 mtrs
CHARACTERISTICS:	BLACKOUT
COLOURS:	11 COLOURS
COATING:	ACRYLIC COATING
COMPOSITION:	100% POLYESTER
FIRE CLASSIFICATION:	TESTED TO AS 1530 PART III PVC FREE/DUST RESISTANT
PECULIAR SMELL:	NO
HINT FOR CARE & CLEANING:	CONDITIONALLY CLEANABLE WITH DAMP CARE
MATCHING COLOURS & PRINT:	WITHIN USUAL TRADE TOLERANCES
AVAILABILITY:	EX STOCK IN ALL STANDARD COLOURS ENCLOSED HEREWITH

STONE FOREST

Roller Blind / Roman Blind / Panel Tracks



**SF111
SAND STONE**



**SF112
SEPIA**



**SF113
CEDAR**



**SF114
MOCHA**

STONE FOREST

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS


COMPOSITION:	PES52 ACRYL48%
WEIGHT (G/m2):	451.2 ($\pm$ 5%)
THICKNESS (mm):	0.69 ($\pm$ 5%)
WIDTH:	2.8 m
ROLL LENGTH:	30 m
DYEING METHOD:	SOLUTION DYED (=DOPE DYED)
TYPE OF FINISHING:	RESIN COATED

STONE FOREST

Roller Blind / Roman Blind / Panel Tracks



SF115
ALMOND LATTE

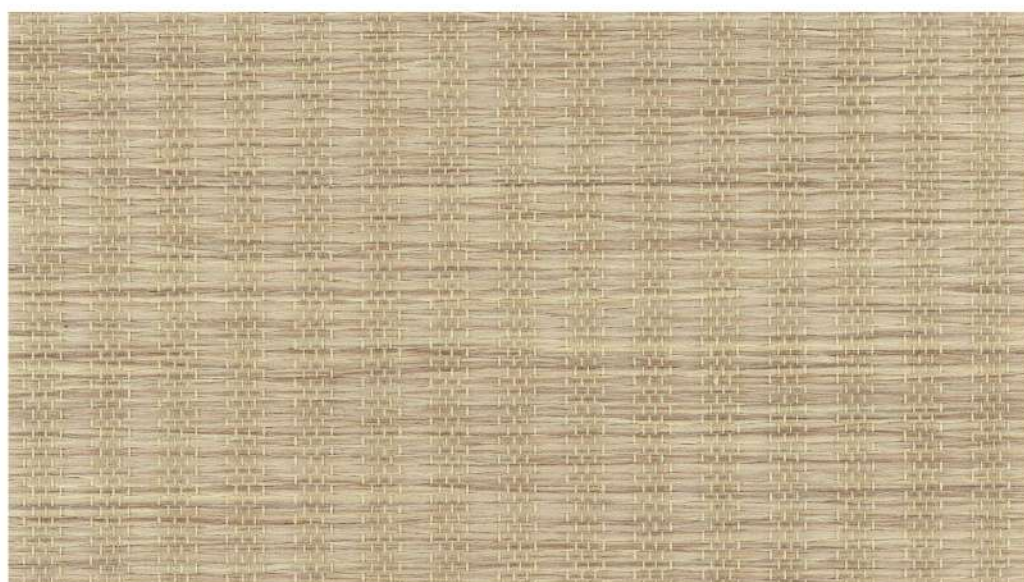

SF116
COFFEE

STONE FOREST

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS


COMPOSITION:	PES 62 ACRYL 38%
WEIGHT (G/m2):	451.1 ($\pm$ 5%)
THICKNESS (mm):	0.78~0.81 ($\pm$ 5%)
WIDTH:	2.8 m
ROLL LENGTH:	30 m
DYEING METHOD:	YARN DYED
TYPE OF FINISHING:	RESIN COATED

TANGO

Roller Blind / Roman Blind / Panel Tracks



**21F
TAPESTRY**

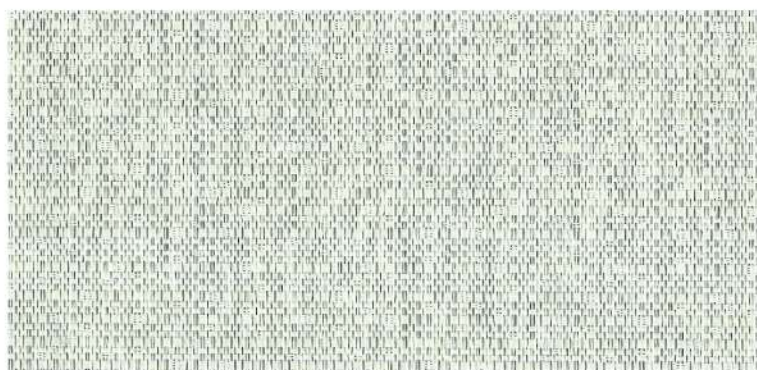

**22F
PASHMINA**



**37F
SHIMMER**



**38F
DAMASK**

TANGO

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS

CATEGORY:	BLACKOUT
COMPOSITION:	PES66% ACRYL34%
DENSITY:	88*74
WEIGHT (G/m2):	434.2 (± 5%)
THICKNESS (mm):	0.68 (± 5%)
FABRIC WIDTH:	2.8mtr
ROLLE LENGTH:	30 mtr
DYEING METHOD:	PIECE DYED
TYPE OF FINISHING:	RESIN COATED

JIVE

Roller Blind / Roman Blind / Panel Tracks

NBT
CURTAIN SYSTEMS



**810 - 7780
CERAMIC**



**810 - 8216
GREY**



**810 - 7779
BEIGE**

JIVE

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS


FABRIC REFERENCE:	40810
BASIC MATERIAL:	100% POLYESTER
FLAME-RETARDANT:	NO
FINISHING:	POLYMER COATING
SUITABLE FOR MOIST ATMOSPHERE:	YES
BACKSIDE:	WHITE/COLOURED
SUITABLE FOR OFFICE ENVIRONMENT:	YES
FINAL WIDTH:	240 cm
FABRIC WEIGHT:CA.	330 G/m²
THICKNESS:	0,51 mm
LIGHT FASTNESS:	> 5-6 DEP. ON COLOUR
RUBBING FASTNESS:	> 4-5
MOISTURE SHRINKAGE:	warp < 0,5 weft < 0,5
RADIATION RATE:	(EN 410) LIGHT-REFLEXION (%):DEP. ON COLOUR LIGHT- TRANSMISSION (%):DEP. ON COLOUR LIGHT-ABSORPTION (%):DEP. ON COLOUR UV-TRANSMISSION(%):DEP. ON COLOUR TOTAL ENERGY-PENETRATION (G-VALUE): DER ON COLOUR
OPACITY OF FABRIC:	BLACKOUT
STANDARD ROLL-LENGTH:	APPROX. 32 m
MANUFACTURING GUIDANCE:	TO CUT WITH COLD KNIFE
CARE INSTRUCTION:	SPONGEABLE

CARINA


Roller Blind / Roman Blind / Panel Tracks



40581-7669
CORN

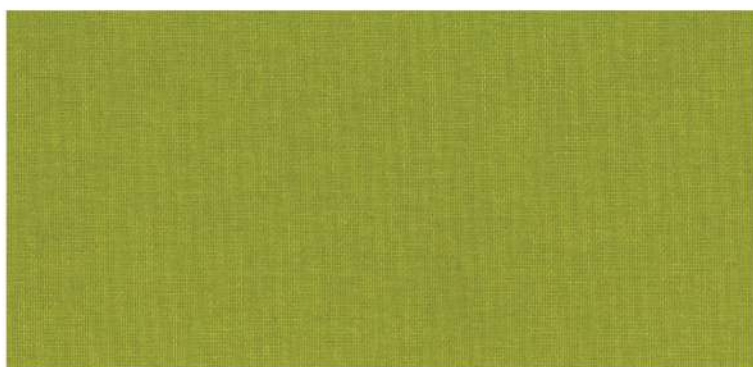

40581-7671
FERN GREEN

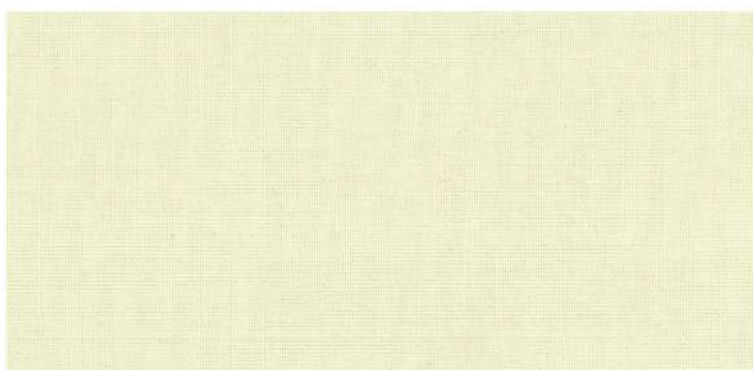

40581-7672
SAND



40581-5088
NAVY

CARINA

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS

BASIC MATERIAL:	100% POLYESTER
WIDTH:	240 cms
WEIGHT:	320 g/m²
THICKNESS:	0.45 mm
CARE INSTRUCTION:	SPONGEABLE
TRANSPARENCY DEGREE:	BLACKOUT
SUITABLE FOR MOIST ATMOSPHERE:	YES
LIGHT FASTNESS:	> 6-7
RUBBING FASTNESS:	>3 DEPENDING ON COLOUR



SUNSCREEN

Roller Blind / Roman Blind / Panel Tracks



ES-2315
FOG GREY




ES-2314
NATURE WHITE



ES-2318
MATTLE GREY



ES-2319
SADDLE

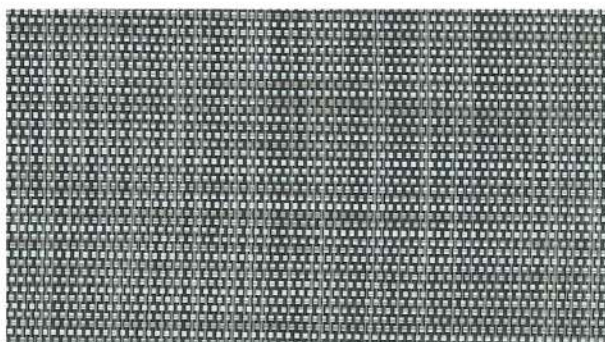

ES-2317
STEEL GREY



ES-2316
CHESTNUT

SUNSCREEN

Roller Blind / Roman Blind / Panel Tracks




TECHNICAL DETAILS

MAXIMUM WIDTH:	250 cm
CHARACTERISTICS:	TRANSLUCENT
OPENNESS FACTOR:	5%
WEIGHT:	428 g/m² ± 5%
COMPOSITION:	30% POLYESTER + 70% PVC
COLOUR FASTNESS:	GRADE 8
THICKNESS:	0.73 mm ± 5%
STANDARD ROLL LENGTH:	30 mtrs
FIRE CLASSIFICATIONS:	NFPA 701- 99 TM#1, CALIFORNIA U.S. TITLE 19
FIRE RESISTANCE:	NFPA 701(USA)
ENVIRONMENTAL BENEFITS:	LEAD FREE, OEKO-TEX 100, GREENGUARD
AVAILABILITY:	EX STOCK IN ALL STANDARD COLOURS ENCLOSED HEREWITH

SUNSCREEN

Roller Blind / Roman Blind / Panel Tracks

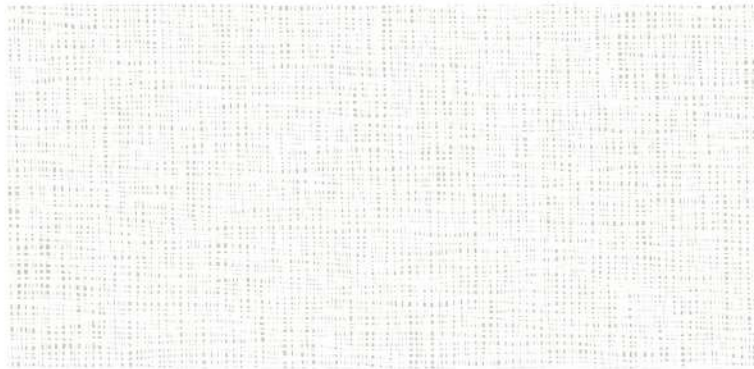

**SS2409
CLOUD**



**SS2411
WHITE OAK BRUSH**



**SS2412
FOSSIL**



**SS2410
COAL**

SUNSCREEN

Roller Blind / Roman Blind / Panel Tracks




TECHNICAL DETAILS


MAXIMUM WIDTH:	250 - 300 cm
CHARACTERISTICS:	TRANSLUCENT
OPENNESS FACTOR:	8%
WEIGHT:	428 g/m² ± 5%
COMPOSITION:	30% POLYESTER + 70% PVC
COLOUR FASTNESS:	GRADE 8
THICKNESS:	0.85 mm ± 5%
STANDARD ROLL LENGTH:	30 mtrs
FIRE CLASSIFICATIONS:	NFPA 701- 99 TM#1, CALIFORNIA U.S. TITLE 19
FIRE RESISTANCE:	NFPA 701(USA)
ENVIRONMENTAL BENEFITS:	LEAD FREE, OEKO-TEX 100, GREENGUARD
AVAILABILITY:	EX STOCK IN ALL STANDARD COLOURS ENCLOSED HEREWITH

SUNSCREEN

Roller Blind / Roman Blind / Panel Tracks

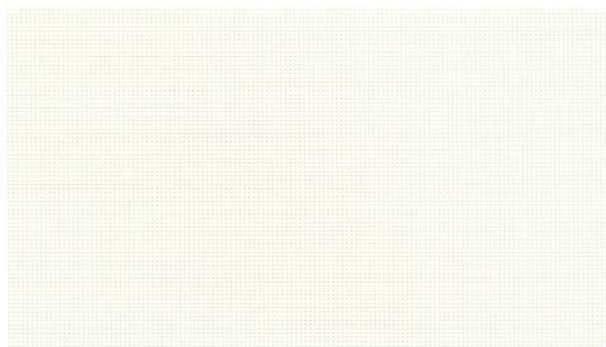


**SS01
FROST**

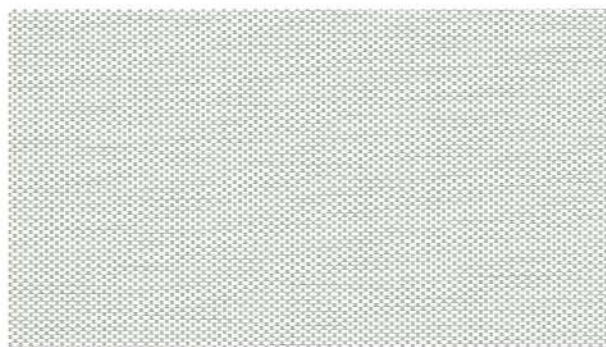


**SS03
GREY**




**SS02
BEACH**

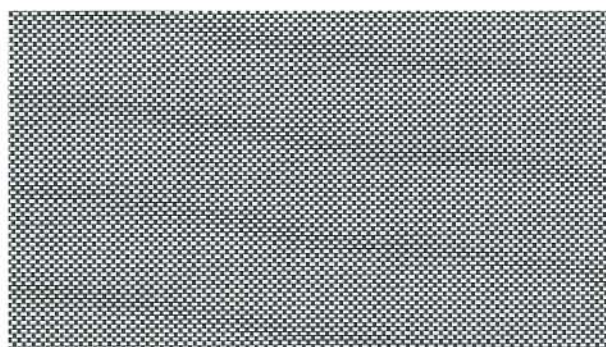

**SS07
CHESS**

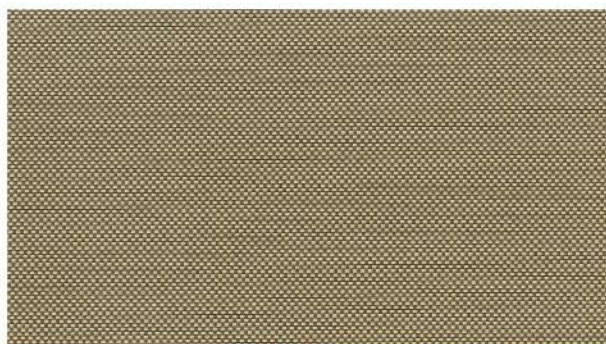

**SS05A
L.BRONZE**

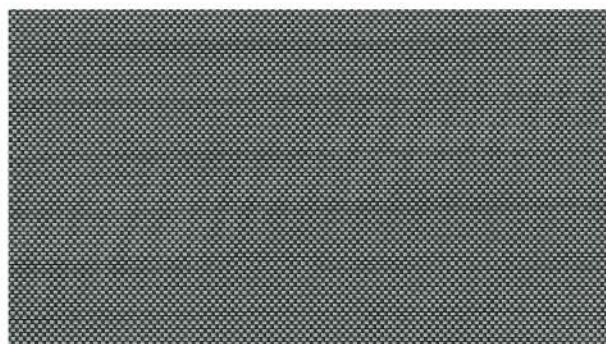

**SS06
GUNMETAL**



**SS08
CARBON**

SUNSCREEN

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS

MAXIMUM WIDTH:	200 - 300 cm
CHARACTERISTICS:	TRANSLUCENT
OPENNESS FACTOR:	5%
WEIGHT:	420 g/m²
COMPOSITION:	25% POLYESTER + 75 % PVC
COLOUR FASTNESS:	GRADE 8
THICKNESS:	0.55 mm
STANDARD ROLL LENGTH:	30 mtrs
AVAILABILITY:	EX STOCK IN ALL STANDARD COLOURS ENCLOSED HEREWITH

SUNSCREEN

Roller Blind / Roman Blind / Panel Tracks


NBT
CURTAIN SYSTEMS




LS04
D. LINEN



LS05
GOLD BROWN

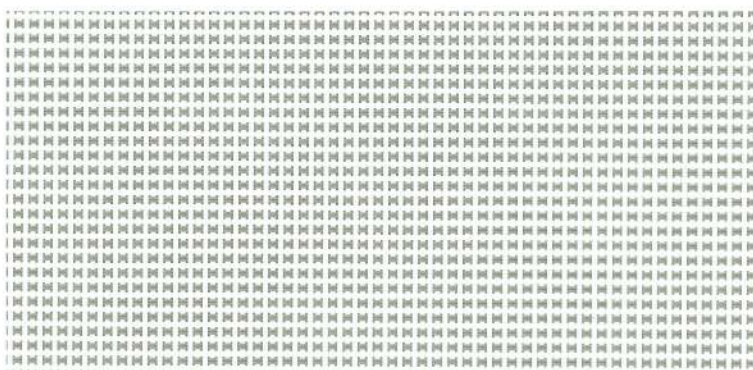

LS06
GREY MARBLE

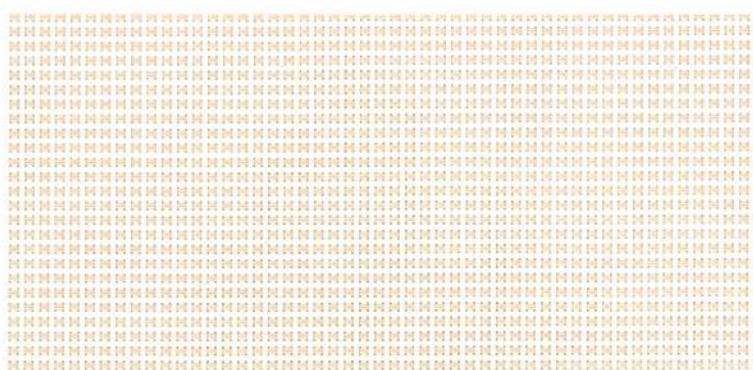

LS07
NATURAL

SUNSCREEN

Roller Blind / Roman Blind / Panel Tracks




TECHNICAL DETAILS


MAXIMUM WIDTH:	200 - 250 cm
CHARACTERISTICS:	TRANSLUCENT
OPENNESS FACTOR:	5%
WEIGHT:	440 g/m² TO 540 g/m²
COMPOSITION:	27% POLYESTER + 73 % PVC
COLOUR FASTNESS:	GRADE 8
THICKNESS:	0.63 mm TO 0.72 t mm
STANDARD ROLL LENGTH:	30 mtrs
AVAILABILITY:	EX STOCK IN ALL STANDARD COLOURS ENCLOSED HEREWITH

SOLAR SCREEN


Roller Blind / Roman Blind / Panel Tracks

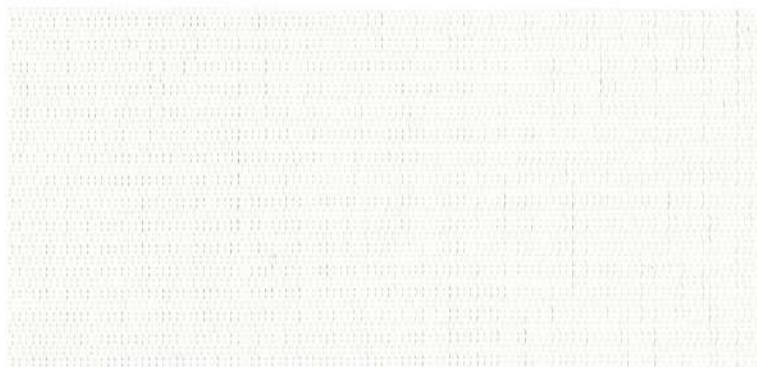


**SS09
PEARL**

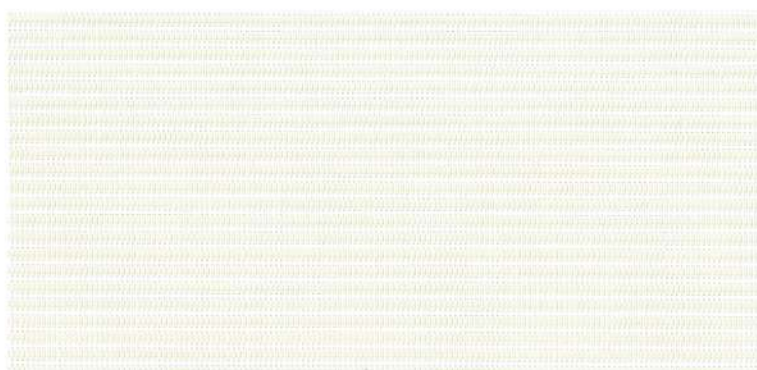

**SS10
ALABASTER**

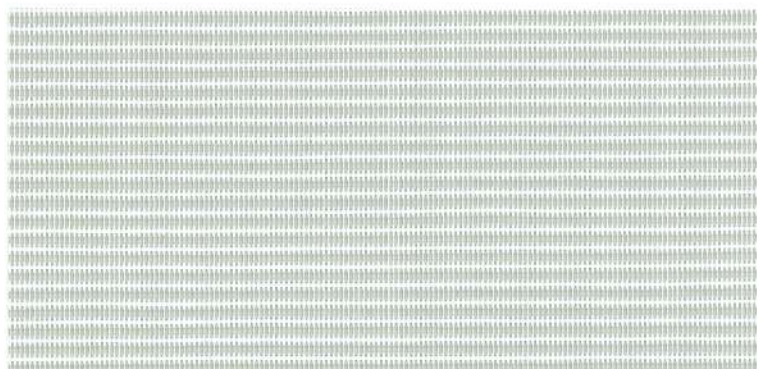

**SS15
GLOW**

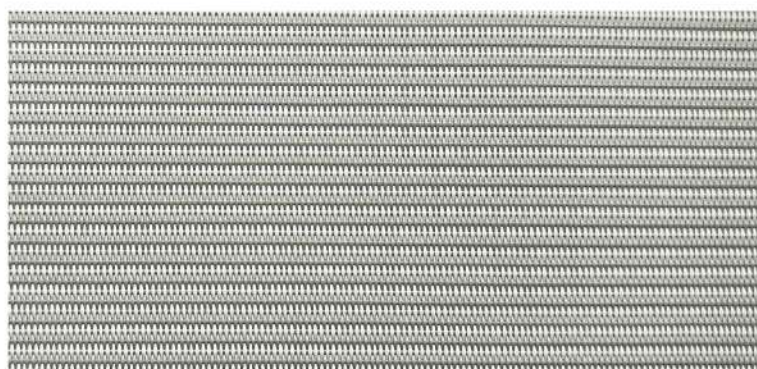

**SS17
WHITE GREY**

SOLAR SCREEN

Roller Blind / Roman Blind / Panel Tracks




TECHNICAL DETAILS


MAXIMUM WIDTH:	160 - 243.8 cm
CHARACTERISTICS:	TRANSLUCENT
OPENNESS FACTOR:	1%
WEIGHT:	690 g/m²
COMPOSITION:	24% POLYESTER + 76% VINYL ON POLYESTER
UV BLOCKAGE:	APPROX 99%
THICKNESS:	1.00 mm
ENVIRONMENTAL CERTIFICATION:	GREENGUARD CERTIFIED
STANDARD ROLL LENGTH:	27.4 mtrs
AVAILABILITY:	EX STOCK IN ALL STANDARD COLOURS ENCLOSED HEREWITH

VEROSOL SCREEN

Roller Blind / Roman Blind / Panel Tracks

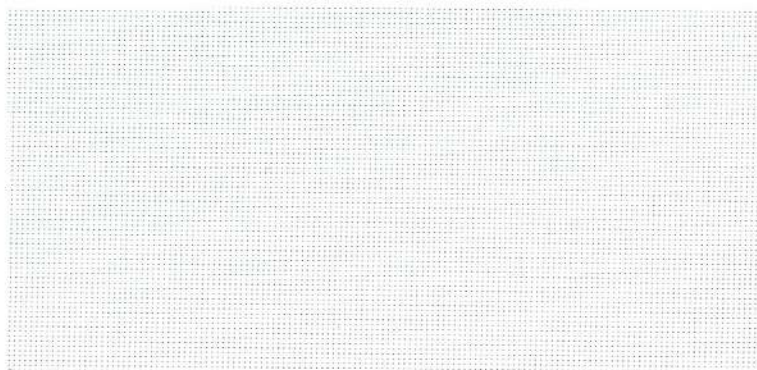


**FD01
WHITE**

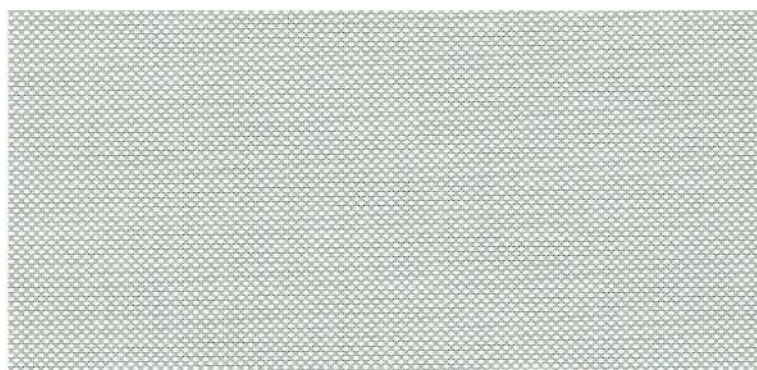

**FD03
LIGHT GREY**



**FD02
BEIGE**

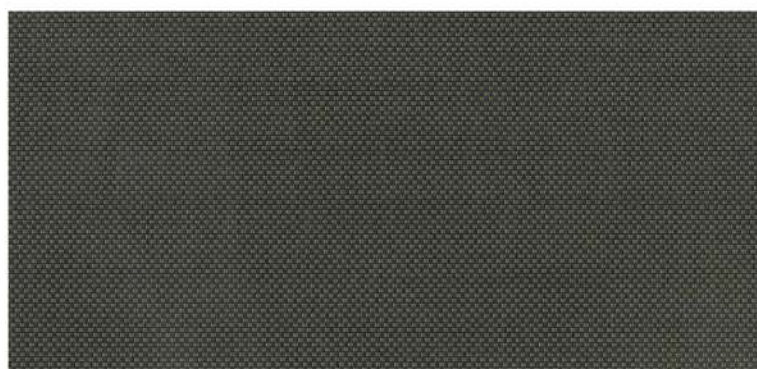

**FB03
BROWN**

VEROSOL SCREEN

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS

WEIGHT:	450 g/m²
THICKNESS:	0.58 mm
WIDTH:	280 cm
FLAME RETARDANT:	NFP 92503 specification M2 NFPA 701 ISO 14001 BS 5867 Part 2 Type B
ENVIRONMENTAL STANDARDS:	Phthalate-free Oko-Tex Standard 100 ISO 14001 and ISO 9001 Greenguard (LEED)

	White FD01	Beige FD02	Light Grey FD03	Brown FD04
Solar reflections outside	74%	73%	73%	72%
Light Transmission (LT)	6%	5%	5%	5%
Openness Factor (OF)	3-4%	3-4%	3-4%	3-4%
IR emissivity metal side	0.14%	0.15%	0.15%	0.15%
Colour rendering index (Ra)	99	99	99	99


High Performance Glazing (reference glazing D EN14501)	Performance of Glazing	White FD01	Beige FD02	Light Grey FD03	Brown FD04
Light Transmission (LT)	60%	4%	4%	4%	4%
g-value / SHGC	32%	15%	15%	15%	16%
U-value (W/m ² K)	1.1	0.8	0.8	0.8	0.8

Insulating Glazing (reference glazing C EN14501)	Performance of Glazing	White FD01	Beige FD02	Light Grey FD03	Brown FD04
Light Transmission (LT)	79%	5%	5%	4%	4%
g-value / SHGC	59%	27%	27%	27%	28%
U-value (W/m ² K)	1.2	0.8	0.8	0.8	0.8




SOUNDLESS ACOUSTIC


Roller Blind / Roman Blind / Panel Tracks

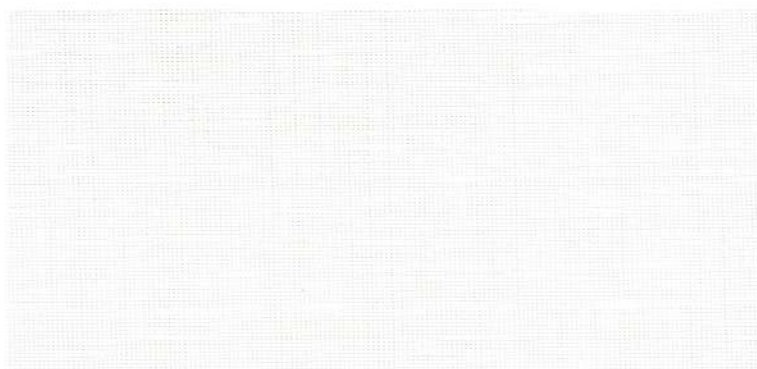


**AN01
LILLY**

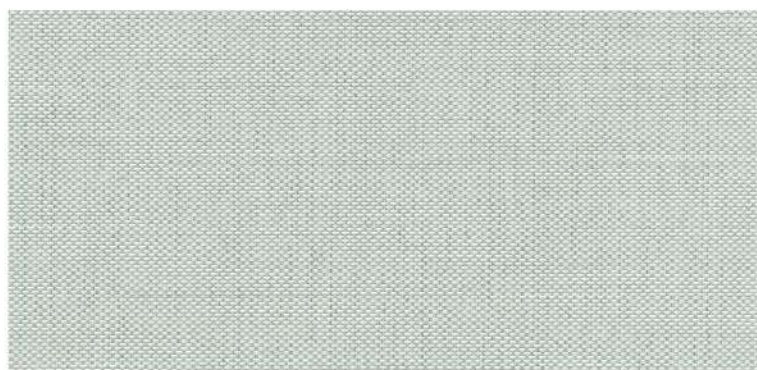

**AN02
SILVER GREY**

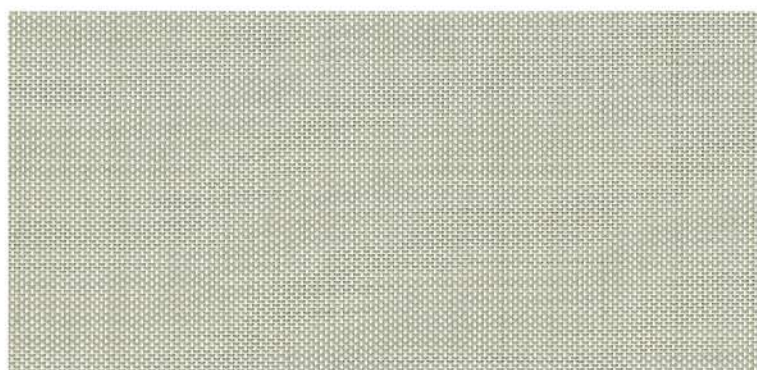

**AN03
BARLEY**

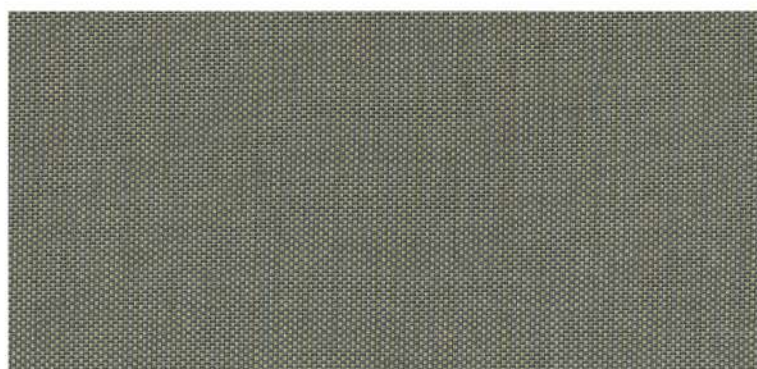

**AN04
ROPE**

SOUNDLESS ACOUSTIC

Roller Blind / Roman Blind / Panel Tracks



TECHNICAL DETAILS


OPENESS FACTOR:	APPROXIMATELY - 1%
COMPOSITION:	40% POLYESTER / 60% ACRYLIC (PVC & LEAD FREE)
THICKNESS:	0.65 MM - 650 MICRONS
WEIGHT:	450 G/M2
WIDTH:	270 CM
FLAME RETARDANT:	M1 / NFP 92-507 M1 / UNE23727-90 B1 / DIN 4102-1
TENSILE STRENGTH (WARP/WEFT):	150 / 100 DAN / 5 CM
TEAR STRENGTH(WARP/WEFT):	15 / 15 DAN
ACOUSTIC ABSORPTION:	AW=0.45
EUROCLASS:	B-S2,D0 / EN 13501-1
QUALITY:	ISO 9001
WARRANTY:	5 YEARS

PORCHE SCREEN FOR ATTRACTIVE OUTDOORS

Roller Blind / Roman Blind / Panel Tracks



**PAT01
WHITE**

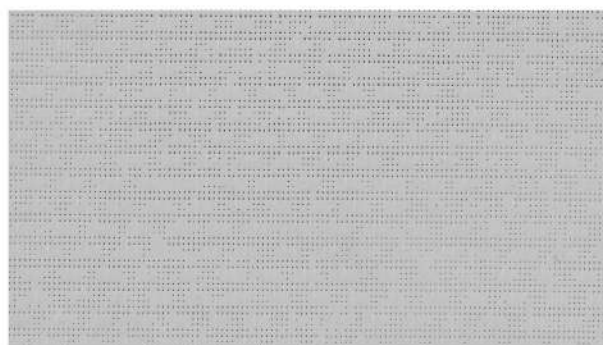

**PAT04
PEBBLE**



**PAT02
SAND**



**PAT05
BLACK**



**PAT03
DARK BEIGE**

PORCHE SCREEN FOR ATTRACTIVE OUTDOORS

Roller Blind / Roman Blind / Panel Tracks



PORCHE SCREEN TECHNICAL SPECIFICATIONS

RANGE:	AERATED VERSION
COMPOSITION OF FABRIC:	40% POLYESTER/ 60% PVC
WEIGHT:	400 g/m2
THICKNESS:	0.45 mm
OPENNESS FACTOR:	4%
STANDARD	
ROLL LENGTH:	40 mtr
TENSILE STRENGTH (WARP/ WEFT):	220/220 DAN/5CM
TEARING STRENGTH (WARP/ WEFT):	(STANDARD: EN ISO 1421) 30/25 DAN (STANDARDS: DIN 53.363)
FIRE RETARDANCY:	RATING: M2 (NFP92-507)
WARRANTY:	5 YEARS

ZIP BLINDS - ONLY ZIP BLINDS OFFERS

- 1. EXCEPTION RAIN PROTECTION AND WIND RESISTANCE OF UP TO 80KM/HR**
- 2. STYLISH DESIGN WITH COMPLETE PRIVACY CONTROL**
- 3. SUPERIOR INSULATION FOR REDUCED ENERGY BILLS**
- 4. EFFORTLESS GLIDE WITH THE TOUCH OF A FINGER**
- 5. SECURE HOLD IN ANY HEIGHT POSITION**
- 6. MAXIMUM SIZE WIDTH 6 MTR & HEIGHT 3 MTR**
- 7. MOTORISATION POSSIBLE**

ULTRA CLEAR PVC WEATHER BLINDS

Roller Blind / Roman Blind / Panel Tracks



0.50MM



0.75MM



ULTRA CLEAR PVC WEATHER BLINDS

Roller Blind / Roman Blind / Panel Tracks






TECHNICAL DETAILS

PVC FABRIC


		0.50 MM	0.75 MM
TENSILE STRENGTH [N] JIS K 6732	M.D. T.D.	135.7 134.6	203.7 184.3
TEAR STRENGTH [N] JIS K 6732	M.D. T.D.	41.9 41.7	67.1 70.1
ELONGATION % JIS K 6732	M.D. T.D.	349 370	366 380
COLD CRACK % JIS K 6772	M.D. T.D.	-45 -35	-50 -50
LIGHT TRANSMISSION % JIS K 7105		87.2	87.9
WEATHER RESISTANCE	800 HOURS	NO MAJOR PHYSICAL PROPERTY CHANGE	

CHOOSE THE MECHANISM




STANDARD ROLLER BLIND

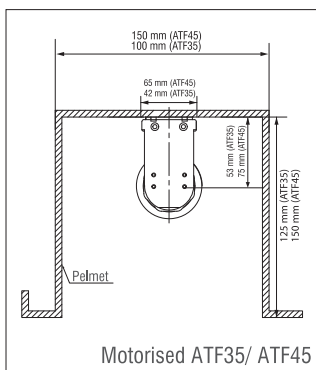



ONE TOUCH TOSO TI1029



AMARI PANEL TRACK

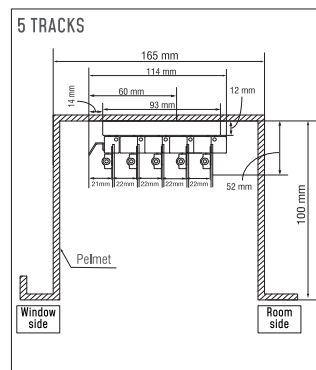

ROMAN BLIND

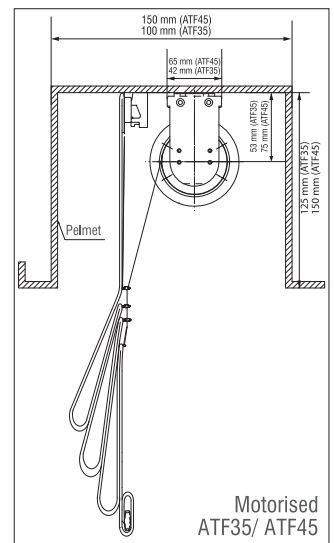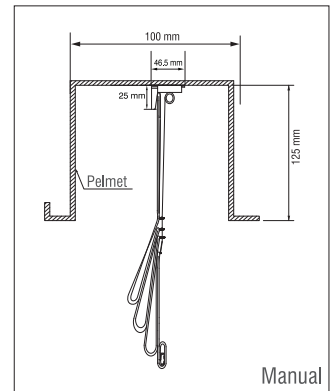

1. MINIMUM 12 SQ. FT. WILL BE CHARGED.
2. MAXIMUM WIDTH 6 FT. AND HEIGHT 8FT. FOR MANUAL BLIND. MAXIMUM SIZE OF AREA 60 SQ.FT. FOR SMOOTH OPERATION.
3. MAXIMUM WIDTH 8 FT. AND MAXIMUM HEIGHT 10 FT. FOR MOTORISED BLIND WITH 35 MM MOTOR.
4. MAXIMUM WIDTH 10 FT. AND MAXIMUM HEIGHT 12 FT. MAXIMUM WEIGHT 12 TO 15 KG WITH 45MM MOTOR.